



LED Emergency Ceiling EcoMax

Features

- Ultra slim
- Flicker free
- Long lifespan
- PMMA diffuser

Benefits

- Flicker-free lamp brings comfort to working and living environment
- Up to 30000Hrs lifespan enables lower maintenance cost
- PMMA diffuser add Materials resistant to high temperature and UV, which could prevent diffuser from yellowing

Application



Library



Shopping Mall



Office



Hospital



Conference Room



School

Specification

Item Code	Item Description	Power (W)	Power Factor	Lumen (lm)	Efficacy (lm/W)	Input Current (mA)	Lifetime (L70B50)	MOQ (pcs)
549003005600	LED Emergency Ceiling-11W-5700-MD	11	0.5	800	75	100	30000	600

Remark: Light control by motion sensor, and emergency battery capacity is 90 minutes. Battery voltage per cell is 3.2V, battery capacity is 750mAh, Luminaire can keep 50lm output under emergency.

Technical Specifications	
CRI	> 80
SCDM	5
Dimmable	No
Beam Angle(°)	120°
Housing Colour	White
IP	IP30
Driver integrated (Yes/No)	Yes
Glow Wire Test	650°C
Driver failure rate	1% at 5000h
Weight (pc/kg)	1.42

Electrical Supply	
Frequency (Hz)	50 / 60
Voltage (V)	220-240
AC/DC	AC


Mechanical Properties	
Housing Material	PC
Optical Material	PMMA

Application Conditions	
Operating Temperature	-20-40°C
Application Temperature	25°C
Storage Environment	-25-60°C


Packaging Information

Item		Single Box(1pc/box)		Packaging Unit		
Item Code	Item Description	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Dimensions(mm) (LxWxH)	Gross Weight (kg)	packing Qty (kg)
549003005600	LED Emergency Ceiling-11W-5700-MD	278*288*97	1.42	500*280*290	8.12	5

Dimensional Drawing

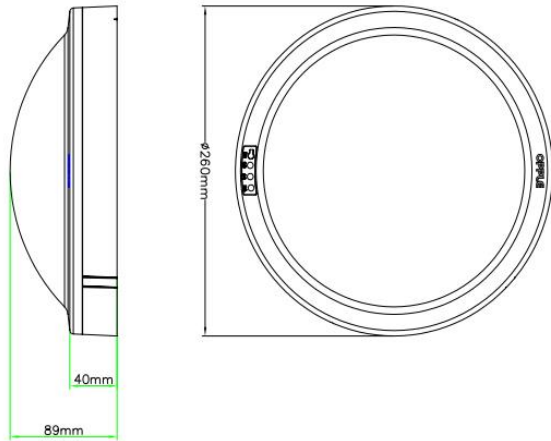

Photometric Data

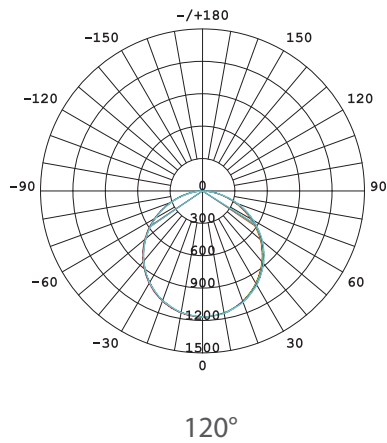

OPPLE SHANGHAI OFFICE

Building V3, The Mixc, 1799 Wuzhong Road,
Minhang District, Shanghai, China

ZIP: 201103

T +86 21 3855 0000

E intersales@opple.com

WWW.OPPLE.COM/EN