



LEDSPOTRA-BY-U



UGR < 19



Anti-glare



CRI > 90



650°C Antiflaming



Flicker Free

Application



Shopping Mall



Office



Hotel



Home

Specification

Item Code	Item Description	Power (W)	CCT (K)	Power Factor	Lumen (lm)	Efficacy (lm/W)	Beam angle	Cutout	Product Dimensions	Life Time (L70B50)	MOQ (pcs)
541003811800	LEDSPOTRA-BY- 5W-3000-24D-BK	5	3000	0.5	390	78	24°	Ø75	Ø88*70	25000H	720
541003811900	LEDSPOTRA-BY- 5W-3500-24D-BK	5	3500	0.5	390	78	24°	Ø75	Ø88*70	25000H	720
541003812000	LEDSPOTRA-BY- 5W-4000-24D-BK	5	4000	0.5	390	78	24°	Ø75	Ø88*70	25000H	720
541003812100	LEDSPOTRA-BY- 7W-3000-24D-BK	7	3000	0.5	520	75	24°	Ø75	Ø88*70	25000H	720
541003812200	LEDSPOTRA-BY- 7W-3500-24D-BK	7	3500	0.5	520	75	24°	Ø75	Ø88*70	25000H	720
541003812300	LEDSPOTRA-BY- 7W-4000-24D-BK	7	4000	0.5	520	75	24°	Ø75	Ø88*70	25000H	720
541003812400	LEDSPOTRA-BY- 9W-3000-24D-BK	9	3000	0.5	580	65	24°	Ø75	Ø88*70	25000H	720
541003812500	LEDSPOTRA-BY- 9W-3500-24D-BK	9	3500	0.5	580	65	24°	Ø75	Ø88*70	25000H	720
541003812600	LEDSPOTRA-BY- 9W-4000-24D-BK	9	4000	0.5	580	65	24°	Ø75	Ø88*70	25000H	720
541003812700	LEDSPOTRA-BY- 5W-24D-BK-TW	5	3000/3500/4000K	0.5	390	78	24°	Ø75	Ø88*70	25000H	720
541003812800	LEDSPOTRA-BY- 7W-24D-BK-TW	7	3000/3500/4000K	0.5	520	75	24°	Ø75	Ø88*70	25000H	720
541003812900	LEDSPOTRA-BY- 9W-24D-BK-TW	9	3000/3500/4000K	0.5	580	65	24°	Ø75	Ø88*70	25000H	720

Technical Specification	
CRI	90
Colour Consistency(SDCM)	≤6
Dimmable	3 CCT
Housing Colour	Black
IP	IP20
IK	IK02
Driver integrated(Yes/No)	No
Glow wire test	650 C
Driver failure rate	1% at 50000
Weight(pc/kg)	0.11

Electrical Supply	
Frequency (Hz)	50/60
Voltage (V)	220-240
AC / DC	AC


Mechanical and Finishing Properties	
Housing Material	PC
Optical Material	PMMA

Application Conditions	
Operating Temperature	-20°C-40°C
Application Temperature	25°C
Storage Environment	-25°C-50°C


Packaging Information

Item		Single box(1pc/box)		Outer box		
Item Code	Item Description	Dimensions(mm) (LxWxH)	Gross Weight (g)	Dimensions(mm) (LxWxH)	Gross Weight (g)	Packing Qty (pcs/CTN)
541003811800	LEDSPOTRA-BY- 5W-3000-24D-BK	93*93*87	0.17	390*295*285	6.05	36
541003811900	LEDSPOTRA-BY- 5W-3500-24D-BK	93*93*87	0.17	390*295*285	6.05	36
541003812000	LEDSPOTRA-BY- 5W-4000-24D-BK	93*93*87	0.17	390*295*285	6.05	36
541003812100	LEDSPOTRA-BY- 7W-3000-24D-BK	93*93*87	0.17	390*295*285	6.05	36
541003812200	LEDSPOTRA-BY- 7W-3500-24D-BK	93*93*87	0.17	390*295*285	6.05	36
541003812300	LEDSPOTRA-BY- 7W-4000-24D-BK	93*93*87	0.17	390*295*285	6.05	36
541003812400	LEDSPOTRA-BY- 9W-3000-24D-BK	93*93*87	0.17	390*295*285	6.05	36
541003812500	LEDSPOTRA-BY- 9W-3500-24D-BK	93*93*87	0.17	390*295*285	6.05	36
541003812600	LEDSPOTRA-BY- 9W-4000-24D-BK	93*93*87	0.17	390*295*285	6.05	36
541003812700	LEDSPOTRA-BY- 5W-24D-BK-TW	93*93*87	0.17	390*295*285	6.05	36
541003812800	LEDSPOTRA-BY- 7W-24D-BK-TW	93*93*87	0.17	390*295*285	6.05	36
541003812900	LEDSPOTRA-BY- 9W-24D-BK-TW	93*93*87	0.17	390*295*285	6.05	36

Dimensional Drawing

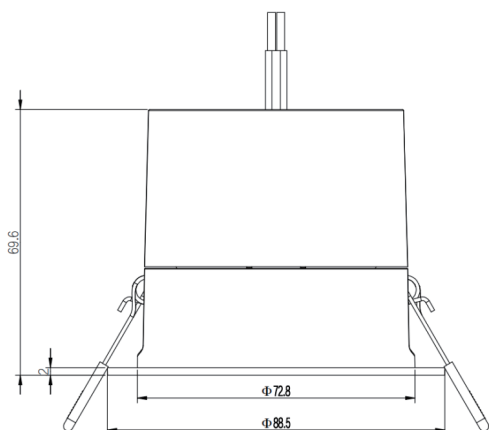

Photometric Data

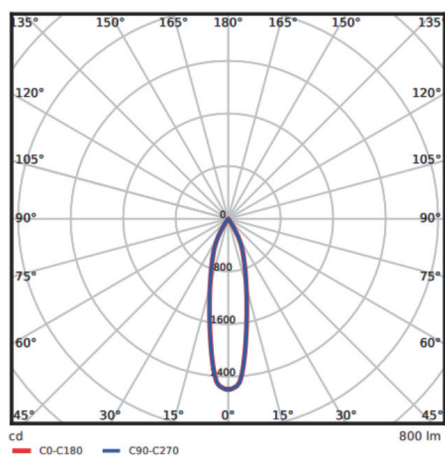

24°

OPPLE SHANGHAI OFFICE
Building V3, The Mixc, 1799 Wuzhong Road,
Minhang District, Shanghai, China
ZIP: 201103
T + 86 21 3855 0000
E intersales@opple.com

WWW.OPPLE.COM/EN