



LED Downlight UA



Up to 120 lm/W



Anti-glare



No Blue Light

## Application



Shopping Mall



Office



Hotel



Home

## Specification

Item Code	Item Description	Power (W)	Power Factor	Lumen (lm)	Efficacy (lm/W)	Input Current (mA)	CCT (K)	Life Time (L70B50)	MOQ (pcs)
540001357800	LEDDownlightRc-UA R75-7W-830	7	0.5	595	85	70	3000	20000	600
540001357900	LEDDownlightRc-UA R75-7W-840	7	0.5	595	85	70	4000	20000	600
540001358000	LEDDownlightRc-UA R75-7W-857	10	0.5	595	85	70	5700	20000	600
540001358300	LEDDownlightRc-UA R100-10W-830	10	0.9	1150	115	50	3000	20000	600
540001358100	LEDDownlightRc-UA R100-10W-840	10	0.9	1200	120	50	4000	20000	600
540001358200	LEDDownlightRc-UA R100-10W-857	20	0.9	1200	120	50	5700	20000	600
540001358400	LEDDownlightRc-UA R125-20W-830	20	0.9	2100	105	110	3000	20000	600
540001358500	LEDDownlightRc-UA R125-20W-840	20	0.9	2300	115	110	4000	20000	600
540001358600	LEDDownlightRc-UA R125-20W-857	30	0.9	2300	115	110	5700	20000	600
540001358700	LEDDownlightRc-UA R150-30W-830	30	0.9	2850	95	160	3000	20000	600
540001358800	LEDDownlightRc-UA R150-30W-840	30	0.9	3000	100	160	4000	20000	600
540001358900	LEDDownlightRc-UA R150-30W-857	30	0.9	3000	100	160	5700	20000	600
540001390600	LEDDownlightRc-UA R200-30W-830-ETO	30	0.9	2850	95	160	3000	20000	600
540001390700	LEDDownlightRc-UA R200-30W-840-ETO	30	0.9	3000	100	160	4000	20000	600
540001390800	LEDDownlightRc-UA R200-30W-857-ETO	40	0.9	3000	100	160	5700	20000	600
540001359000	LEDDownlightRc-UA R200-40W-830	40	0.9	4200	105	220	3000	20000	600
540001359100	LEDDownlightRc-UA R200-40W-840	40	0.9	4600	115	220	4000	20000	600
540001359200	LEDDownlightRc-UA R200-40W-857		0.9	4600	115	220	5700	20000	600

Technical Specification	
CRI	80
Colour Consistency(SDCM)	≤6
Dimmable	No
Housing Colour	White+Black
IP	IP20
IK	IK02
Driver integrated(Yes/No)	No
Glow wire test	650 C
Driver failure rate	1% at 50000
Weight(pc/kg)	0.25/0.29/0.32/0.35/0.5

Electrical Supply	
Frequency (Hz)	50/60
Voltage (V)	220-240
AC / DC	AC


Mechanical and Finishing Properties	
Housing Material	Aluminum
Optical Material	PC

Application Conditions	
Operating Temperature	-20-+40°C
Application Temperature	25°C
Storage Environment	-25-+50°C

## Packaging Information


Item Code	Item Description	Single box(1pc/box)		Packaging Unit		
		Dimensions(mm) (LxWxH)	Gross Weight (kg)	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Packing Qty (pcs/CTN)
540001357800	LEDDownlightRc-UA R75-7W-830	91*89*48	0.30	330*260*255	8.91	30
540001357900	LEDDownlightRc-UA R75-7W-840	91*89*48	0.30	330*260*255	8.91	30
540001358000	LEDDownlightRc-UA R75-7W-857	91*89*48	0.30	330*260*255	8.91	30
540001358300	LEDDownlightRc-UA R100-10W-830	118*116*57	0.32	415*305*255	9.60	30
540001358100	LEDDownlightRc-UA R100-10W-840	118*116*57	0.32	415*305*255	9.60	30
540001358200	LEDDownlightRc-UA R100-10W-857	118*116*57	0.32	415*305*255	9.60	30
540001358400	LEDDownlightRc-UA R125-20W-830	143*141*57	0.39	445*310*340	7.80	20
540001358500	LEDDownlightRc-UA R125-20W-840	143*141*57	0.39	445*310*340	7.80	20
540001358600	LEDDownlightRc-UA R125-20W-857	143*141*57	0.39	445*310*340	7.80	20
540001358700	LEDDownlightRc-UA R150-30W-830	178*176*67	0.43	630*365*205	8.60	20
540001358800	LEDDownlightRc-UA R150-30W-840	178*176*67	0.43	630*365*205	8.60	20
540001358900	LEDDownlightRc-UA R150-30W-857	178*176*67	0.43	630*365*205	8.60	20
540001390600	LEDDownlightRc-UA R200-30W-830-ETO	231*229*70	0.58	472*370*250	5.80	10
540001390700	LEDDownlightRc-UA R200-30W-840-ETO	231*229*70	0.58	472*370*250	5.80	10
540001390800	LEDDownlightRc-UA R200-30W-857-ETO	231*229*70	0.58	472*370*250	5.80	10
540001359000	LEDDownlightRc-UA R200-40W-830	231*229*70	0.58	472*370*250	5.80	10
540001359100	LEDDownlightRc-UA R200-40W-840	231*229*70	0.58	472*370*250	5.80	10
540001359200	LEDDownlightRc-UA R200-40W-857	231*229*70	0.58	472*370*250	5.80	10

## Dimensional Drawing

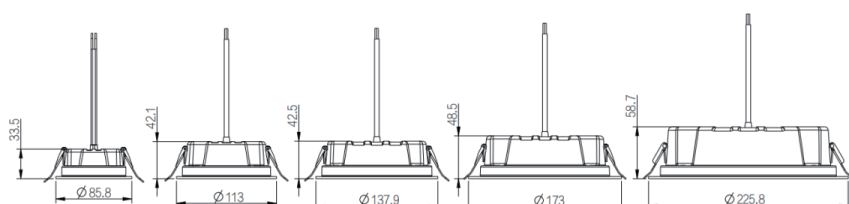


Type	H(mm)	D(mm)
LED DL-RC-UA-R75-7W	33.5	86
LED DL-RC-UA-R100-10W	42	113
LED DL-RC-UA-R125-20W	42.5	138
LED DL-RC-UA-R150-30W	48.5	173.2
LED DL-RC-UA-R200-30W	58.7	226
LED DL-RC-UA-R200-40W	58.7	226


## Photometric Data

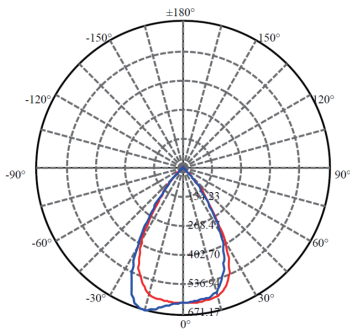


7W

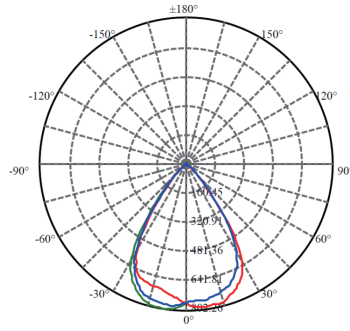


10W

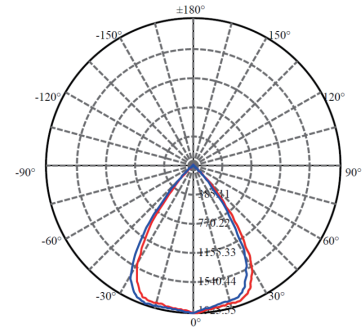

20W

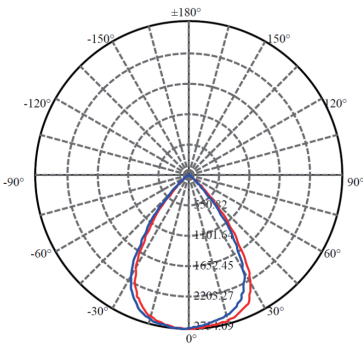

30W

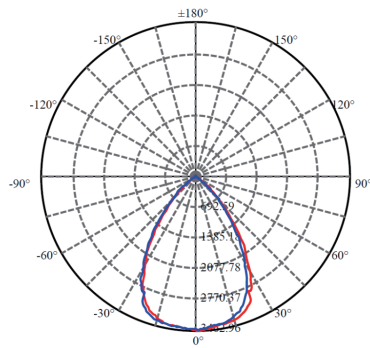

40W

### OPPLE SHANGHAI OFFICE

Building V3, The Mixc, 1799 Wuzhong Road,  
Minhang District, Shanghai, China  
ZIP: 201103

**T** + 86 21 3855 0000

**E** intersales@opple.com

**WWW.OPPLE.COM/EN**