

LED Linear Track P2--Sonder2



Safty 24V



APP Control



Easy Move



Seamless
Connection



Customization
Length



Ra>90

Application



Office



Exhibition hall



Shopping mall

Specification

Item Code	Item Description	Power (W)	CCT (K)	Voltage (V)	Lumen (lm)	Angle Beam (°)	Input Current (mA)	Lifetime (L70B50)	MOQ (pcs)
541001144600	LSL009002-LV-SP-Sonder 2-9W-24°-930-BK	9	3000	24	820	24	0.01	30000	800
541001144700	LSL009002-LV-SP-Sonder 2-9W-24°-940-BK	9	4000	24	820	24	0.01	30000	800
541001144800	LTH0209004-LV-Dropper-SP-Sonder2-9W-24°-930-BK	9	3000	24	820	24	0.01	30000	800
541001144900	LTH0209004-LV-Dropper-SP-Sonder2-9W-24°-940-BK	9	4000	24	820	24	0.01	30000	800
541001145000	LGS209104-LV-Grid-Sonder2-9W-30°-930-BK	9	3000	24	820	30	0.01	30000	800
541001145100	LGS209104-LV-Grid-Sonder2-9W-30°-940-BK	9	4000	24	820	30	0.01	30000	800
541001145200	LGS218104-LV-Grid-Sonder2-18W-30°-930-BK	18	3000	24	1500	30	0.01	30000	800
541001145300	LGS218104-LV-Grid-Sonder2-18W-30°-940-BK	18	4000	24	1500	30	0.01	30000	800
541001145400	LGS205104-LV-U-turn-Grid-Sonder2-5W-30°-930-BK	5	3000	24	450	30	0.01	30000	800
541001145500	LGS205104-LV-U-turn-Grid-Sonder2-5W-30°-940-BK	5	4000	24	450	30	0.01	30000	800
541001145600	LGS209105-LV-U-turn-Grid-Sonder2-9W-30°-930-BK	9	3000	24	820	30	0.01	30000	800
541001145700	LGS209105-LV-U-turn-Grid-Sonder2-9W-30°-940-BK	9	4000	24	820	30	0.01	30000	800
541001145800	LXQ12030902-LV-WW-Sonder2-9W-1/1/6-930-BK	9	3000	24	800	/	0.01	30000	800
541001145900	LXQ12030902-LV-WW-Sonder2-9W-1/1/6-940-BK	9	4000	24	800	/	0.01	30000	800
541001146000	LTY14031802-LV-FL-Sonder2-18W-930-BK	18	3000	24	830	/	0.02	30000	800
541001146100	LTY14031802-LV-FL-Sonder2-18W-940-BK	18	4000	24	830	/	0.02	30000	800
541001146200	LTY15872702-LV-FL-Sonder2-27W-930-BK	27	3000	24	1230	/	0.02	30000	800
541001146300	LTY15872702-LV-FL-Sonder2-27W-940-BK	27	4000	24	1230	/	0.02	30000	800

Technical Specification	
On/Off Cycles	50000
Colour Consistency(SDCM)	<5
Tunable	No
Housing Colour	Black
IP	IP20
Driver integrated(Yes/No)	No
Glow wire test	650 C

Electrical Supply	
Frequency (Hz)	50/60
Voltage (V)	24/240(driver)
AC / DC	AC

Mechanical and Finishing Properties	
Housing Material	Aluminum
Optical Material	PC


Application Conditions	
Operating Temperature	-20 C -40 C
Storage Environment	-25-50 C

Packaging Information


Item		Inner Box	Outer box	
Item Code	Item Description	Product dimension(mm) (LxWxH)	Dimensions(mm) (LxWxH)	Packing Qty (pcs/CTN)
541001144600	LSL009002-LV-SP-Sonder 2-9W-24°-930-BK	85*47*164	340*255*190	20
541001144700	LSL009002-LV-SP-Sonder 2-9W-24°-940-BK	85*47*164	340*255*190	20
541001144800	LTH0209004-LV-Dropper-SP-Sonder2-9W-24°-930-BK	85*57*255	445*267*250	20
541001144900	LTH0209004-LV-Dropper-SP-Sonder2-9W-24°-940-BK	85*57*255	445*267*250	20
541001145000	LGS209104-LV-Grid-Sonder2-9W-30°-930-BK	224*32*49	285*260*150	20
541001145100	LGS209104-LV-Grid-Sonder2-9W-30°-940-BK	224*32*49	285*260*150	20
541001145200	LGS218104-LV-Grid-Sonder2-18W-30°-930-BK	441*32*49	485*295*150	20
541001145300	LGS218104-LV-Grid-Sonder2-18W-30°-940-BK	441*32*49	485*295*150	20
541001145400	LGS205104-LV-U-turn-Grid-Sonder2-5W-30°-930-BK	115*34*80	270*210*180	20
541001145500	LGS205104-LV-U-turn-Grid-Sonder2-5W-30°-940-BK	115*34*80	270*210*180	20
541001145600	LGS209105-LV-U-turn-Grid-Sonder2-9W-30°-930-BK	224*32*80	370*260*180	20
541001145700	LGS209105-LV-U-turn-Grid-Sonder2-9W-30°-940-BK	224*32*80	370*260*180	20
541001145800	LXQ12030902-LV-WW-Sonder2-9W-1/1/6-930-BK	224*30*48	280*260*145	20
541001145900	LXQ12030902-LV-WW-Sonder2-9W-1/1/6-940-BK	224*30*48	280*260*145	20
541001146000	LTY14031802-LV-FL-Sonder2-18W-930-BK	441*32*49	485*295*150	20
541001146100	LTY14031802-LV-FL-Sonder2-18W-940-BK	441*32*49	485*295*150	20
541001146200	LTY15872702-LV-FL-Sonder2-27W-930-BK	605*32*49	650*295*150	20
541001146300	LTY15872702-LV-FL-Sonder2-27W-940-BK	605*32*49	650*295*150	20

Accessory


Accessories		Packing Unit	MOQ
Item Code	Item Description	Dimensions(mm) (LxWxH)	
550000008100	LG3107-LV-Surface-Track-Sonder 2-0.5m-BK	500*23*7.5	500
550000008200	LG3157-LV-Surface-Track-Sonder 2-1m-BK	1000*23*7.5	500
550000008300	LG3207-LV-Surface-Track-Sonder 2-2m-BK	2000*23*7.5	500
550008003900	LG3/I2-LV-Track-Sonder 2-ACC-line connector-BK	43*27*43	500
550008004000	LG3/V2-LV-Track-Sonder 2-ACC-Coner Plane connector-BK	43*27*43	500
550008004100	LG3/V2-LV-Track-Sonder 2-ACC-Coner Stereo connector-BK	43*27*43	500
820009003600	OP-IESVC1600024E1-01-Sonder 2-160W24V	290*32*49	500




Dimensional Drawing

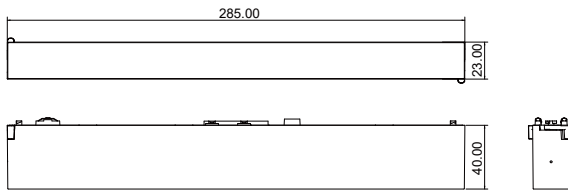


OP-IESVC1600024E2-01-Tunable-Sonder 2-160W24V

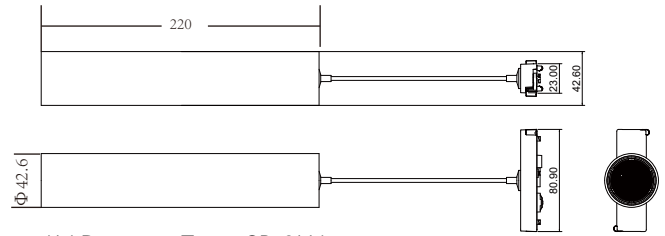


LV Dropper-ZoomSP-9W

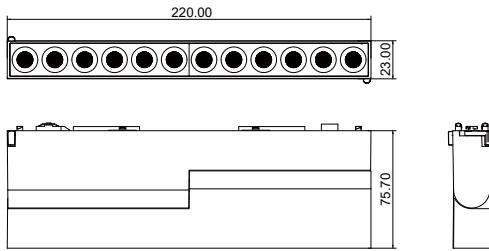

U-turn-Grid-9W

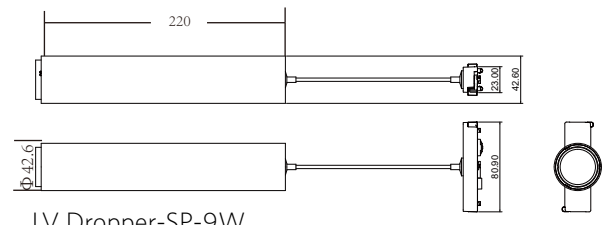


LV Dropper-SP-9W

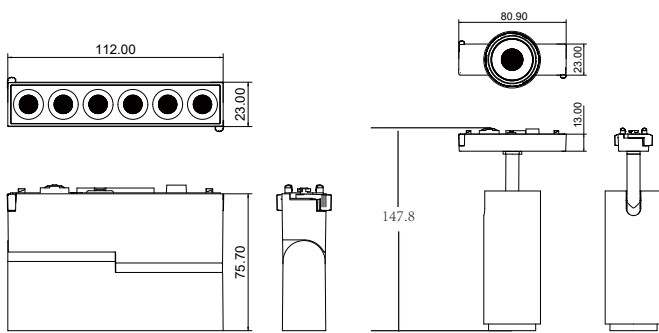


U-turn-Grid-5W

LV-SP 9W

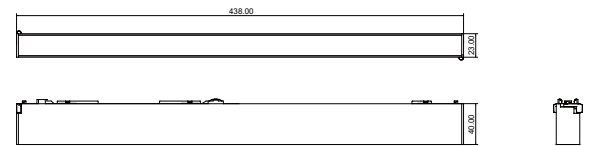


LV-Grid-18W

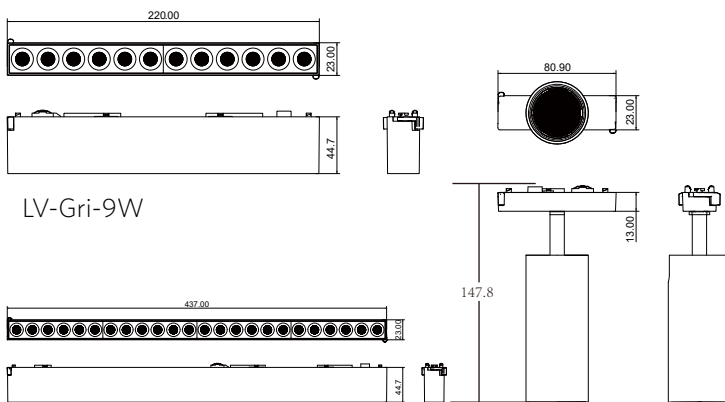


LV-Gri-9W


LV ZoomSP 9W

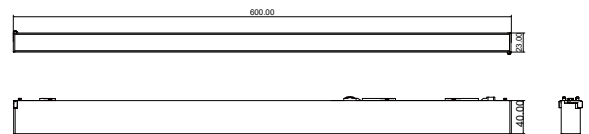

LV-FL-27W



LV-Grid-18W

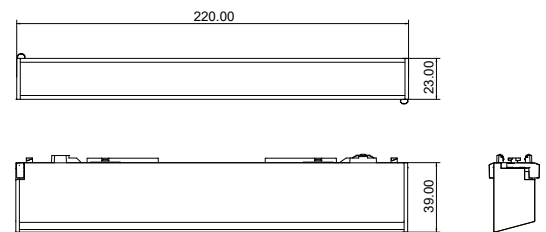

LV-WW-9W

OPPLE SHANGHAI OFFICE
 Building V3, The Mixc, 1799 Wuzhong Road,
 Minhang District, Shanghai, China
 ZIP: 201103
T + 86 21 3855 0000
E intersales@opple.com

WWW.OPPLE.COM/EN